


S12 MagniV® Mixed-Signal MCUs S12ZVMA Family

Integrated solution with half bridge driver (unidirectional DC-motor or other loads)

Features

-  DC Motor Control
-  Integrated LIN PHY
-  V_{REG} for 12 V Supply
-  2-ch. MOSFET Gate Driver
-  Ultra-reliable Industrial
-  AEC-Q100 Grade0 (150 °C Ta / 175 °C Tj)

Product One-Pager

System in a package—Highly integrated solution ideal for mechatronic approach to DC Motors controlled by LIN or PWM command

Scalable—32-/48-pin, up to 32 KB flash, up to 150 °C Ta

High reliability—High immunity to EMI and ESD stresses, LIN 2.x compliant with +/- 8 kV ESD capability

Low system cost—Operating straight from car battery, integrated PHY for LIN, 2-channel motor control MOSFET gate pre-drivers and op-amp for current sensing to reduce BOM

Enablement—Supported by comprehensive hardware and software solution


S12ZVMA Specifications

Core	S12Z; 32 MHz bus	Gate Driver	2-ch. FET Gate driver
12V VREG	70 mA/170 mA	PWM	6-ch. motor control PWM
Flash	16-32 KB	PTU	Triggering ADC & PWM
RAM	1–2 KB	ADC	7-ch., 10-bit
EEPROM	128 B	OpAmp	1 x for current sensing
Core	S12Z	EVDD	1-ch. 5 V/ 20 mA (source)
Phy	LIN	Packages	32/48 LQFP
SCI/SPI	1/1	Temperature	Up to 150 °C Ta / 175 °C Tj
Timer	2-ch. + 2-ch., 16-bit	Op Range	3.5 V–20 V


Sample Part Numbers

Part Number	Flash	Temp Range	Package	Available
P912ZVMAL3F0MLF	32 KB	-40 °C to 125 °C	48-LQFP	Now
P912ZVMAL3F0MLC	32 KB	-40 °C to 125 °C	32-LQFP	Q3 '17
P912ZVMAL3F0WLF	32 KB	-40 °C to 150 °C	48-LQFP	Q3 '17
P912ZVMAL3F0WLC	32 KB	-40 °C to 150 °C	32-LQFP	Q3 '17

Product Block Diagram

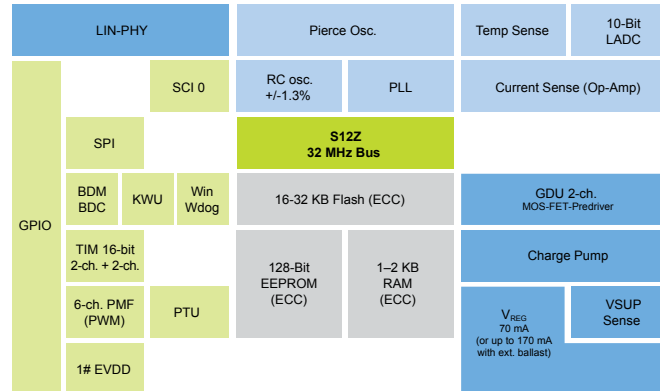

Application Example Block Diagram

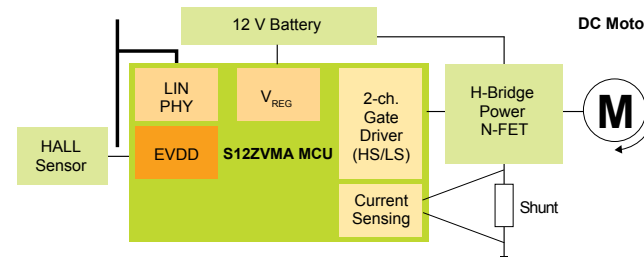

Target Applications

- ▶ DC-motor drive
- ▶ LIN-based actuators
- ▶ Solenoids
- ▶ Valves
- ▶ Smart junction box
- ▶ Driving resistive or inductive loads
- ▶ Pumps (fuel/water/oil)
- ▶ Fans/blower

Enablement Tools

- ▶ Evaluation boards/hardware
 - X-S12ZVMAEVB
- ▶ Compiler/Debugger
 - CodeWarrior® IDE
 - Cosmic IDE
- ▶ LIN Stack

Availability

Samples & tools available in limited quantity. Please contact local sales representative



www.NXP.com/S12ZVMA

NXP, the NXP logo, CodeWarrior and MagniV are trademarks of NXP B.V. All other product or service names are the property of their respective owners. © 2016 NXP B.V.

Document Number: S12ZVMAFS REV 1

